


LABFACILITY L200 USB HIGH PRECISION DIGITAL THERMOMETER/DATA LOGGER



Front Panel Mount Option

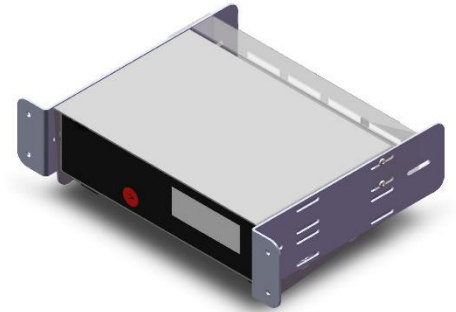

Rear Panel Mount Option

The Labfacility L200 Pt100 and thermocouple thermometer can be used in conjunction with a PC to provide accurate, versatile 8 channel thermocouple and Pt100 temperature measurement, scanning and logging of measured values. It can also be used as a "stand alone" indicator/logger and incorporates a digital display of measured temperature.

The in-built, self-calibration facility for the thermocouple version is a rapid and convenient method for on-site calibration and does not require any additional equipment other than a special, external link. Self-calibration of Pt100 ranges is equally simple and uses plug-in precision resistors.

The L200 is designed to provide exceptional stability with high measurement resolution and represents an ideal crossover between plant practicality and laboratory performance at a very competitive price.

The PC software supplied with the instrument allows control, measure and calibration functions.

The bench top case can be converted to a panel mounting configuration using the optional mounting brackets.

LAB080/1216

- *Low cost – high performance*
- *Bench top or panel mounting*
- *USB PC interface*
- *8 thermocouple (type J,K,T,E,N,R,S & B) or Pt100 (3 wire) inputs*
- *Built-in display for selected channel or all channels auto-scrolling*
- *Resolution 0.1°C on L200 display, 0.01°C in software*
- *Self-calibration feature*
- *Select °C / °F*
- *PC software included for remote control and measure, logging and calibration*
- *Simple operation*
- *CE marked*
- *RoHS compliant*
- *2 year warranty*

Applications

- ◆ Food preparation ◆ Storage facilities ◆ Free standing or in-panel ◆ Technical educational establishments
- ◆ Environmental ◆ R&D ◆ Heating & ventilation setup ◆ Building & energy management
- ◆ Instrumentation laboratories ◆ Experimentation ◆ Refrigeration/freezer plant monitoring
- ◆ Museums and Galleries



Specification at an ambient temperature of 20°C

Input / Ranges

Thermocouple to IEC 584

Type J -200°C to 750°C

Type K -200°C to 1200°C

Type T -200°C to 350°C

Type E -200°C to 900°C

Type N 0°C to 1300°C

Type R 0°C to 1760°C

Type S 0°C to 1760°C

Type B 300°C to 1800°C

Pt100 to IEC751, 3 wire -200°C to 850°C

Note: all inputs are non-isolated and sensors must be of insulated construction.

Accuracy

Thermocouples J K T E & N better than $\pm 0.1^\circ\text{C}$ $\pm 0.1\%$ of range -100°C to span (Zero to span Type N) $\pm 0.15\%$ of range -101 to -200°C (J K T & E)

Thermocouples R S & B better than $\pm 0.1^\circ\text{C}$ $\pm 0.15\%$ of range

Linearisation $\pm 0.05^\circ\text{C}$

Pt100 range better than $\pm 0.05^\circ\text{C}$ $\pm 0.1\%$ of range

Zero drift $\pm 0.01\%$ of span per $^\circ\text{C}$

Span drift $\pm 0.01\%$ of span per $^\circ\text{C}$

Display LCD, backlight

Display resolution Thermocouple ranges 0.1°C , Pt100 range 0.01°C

User interface Front panel key for channel No. or auto-scan selection. PC software for all other functions.

Indication Channel No., measured temperature ($^\circ\text{C}$ or $^\circ\text{F}$)

Reference junction compensation for thermocouples Automatic, accurate reference junction compensation is incorporated for thermocouple ranges

Self calibration User facility incorporated. The instrument auto-calibrates on every A/D cycle *

Sensor open circuit detection & indication	Upscale indication Independent alarms should be used for Process safety if required
Ambient operating Temperature	0 to 50°C
Storage temperature	-20°C to 70°C
Display	LCD with backlight
Input Terminations	8 x thermocouple: mini connectors 8 x Pt100, terminal blocks
PC Interface	USB
Power supply	6Vdc (5.5-9.0V) via universal mains adaptor (supplied) 120-250V 50/60Hz
Logging interval	5 seconds to 1 hour
On-board memory	512 sets of readings
PC software	Supplied as standard on CD-ROM Remote control & measure: - Log readings to file Download to PC Logging, calibration

* The integral, self-calibration facility for the thermocouple version is a rapid and convenient method for on-site calibration and does not require any additional equipment other than the special, external link (optional). Self-calibration of Pt100 ranges is quickly and conveniently performed using plug-in precision resistors (optional). Traceable calibration can be achieved by the user conveniently and without recourse to a accredited Laboratory if there is access to a certified DVM; this can be used to measure the L200 internally generated calibrated Voltage via the “cal port” presented externally to the instrument case. Considerable time and cost saving are achieved by this method.




Standard accessories

The L200 is supplied with a power supply adaptor, USB lead, PC software, and instruction manual (on CD). L200-TC includes external link.


Optional accessories

Panel mounting brackets.


L200 Panel Mounting - Schematics

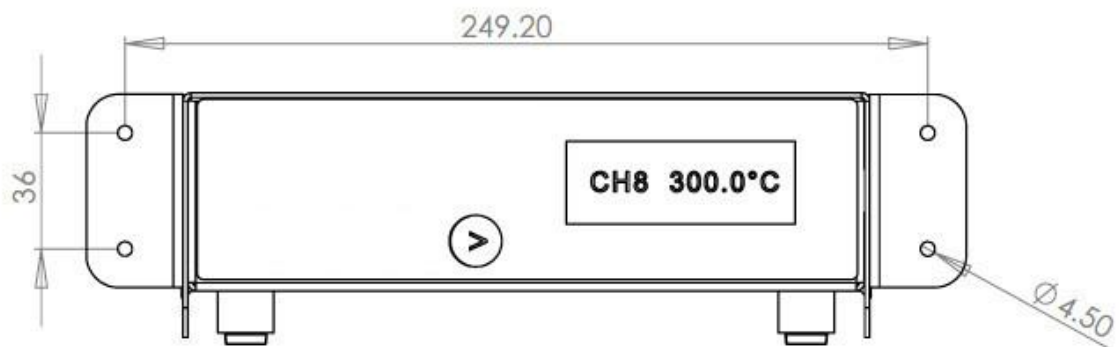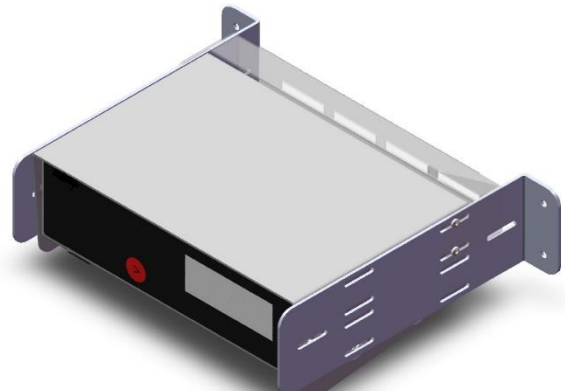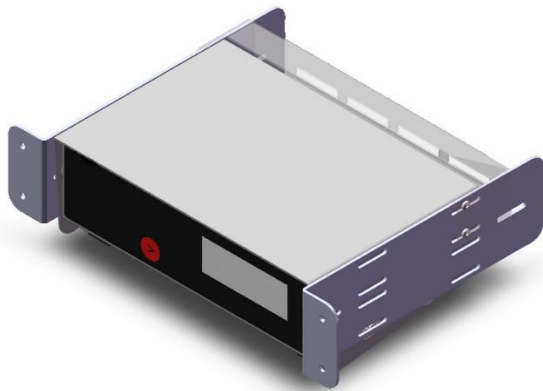

Rear Panel Mount

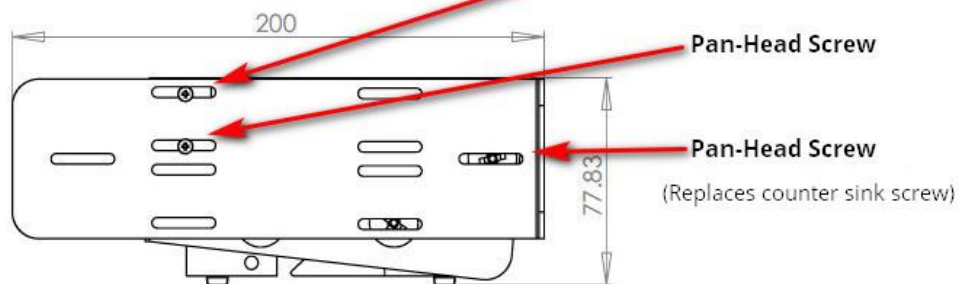

Front Panel Mount

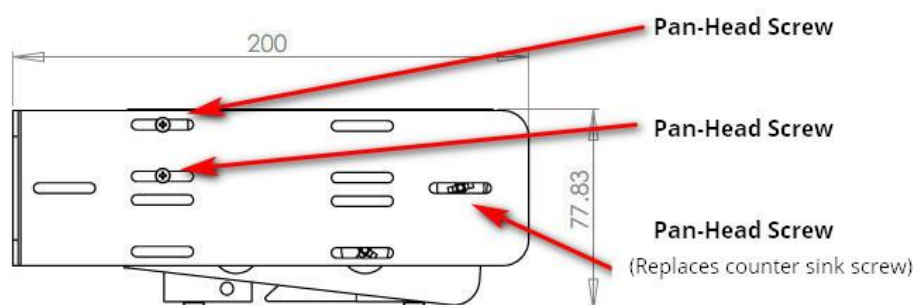

L200 Schematic

