



**HANDLE AND STATOR**

Glass-fibre reinforced polyamide based (PA) technopolymer.

**ROTOR**

Chrome-plated zinc alloy.

**FRONT PLATE**

Stainless steel.

**NUT**

M22x1.5 technopolymer.

**FLAT CLOSING LEVER**

Zinc-plated steel, thickness 3 mm.

**PACKING RING**

NBR rubber.

**SELF-TAPPING SCREW**

Zinc-plated steel.

**TWO KEYS**

Nickel-plated brass, removable in two positions at 180°.

**ROTATION**

90° clockwise (right).

**IP PROTECTION**

IP 65 protection class, according to IEC 529 (see page A-19).

**STANDARD EXECUTIONS**



- **CSMT.**: lock with 400 different combinations. Each lock has a couple of keys with different combination.
- **CSMTU.**: lock with one combination. All locks have the same combination which can be opened with the same key.

**SPECIAL EXECUTIONS ON REQUEST**

Closing levers in other dimensions.



Drilling template

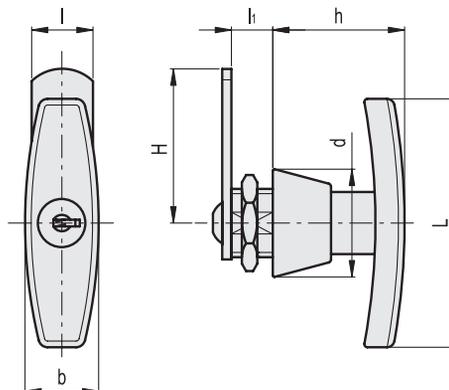

Code	Description	H	L	l	l1	b	h	d	△△
421521	CSMT.50	50	80	20	13.5	24	43	37	107
421523	CSMTU.50	50	80	20	13.5	24	43	37	107